


# CM50 Wiring Instructions

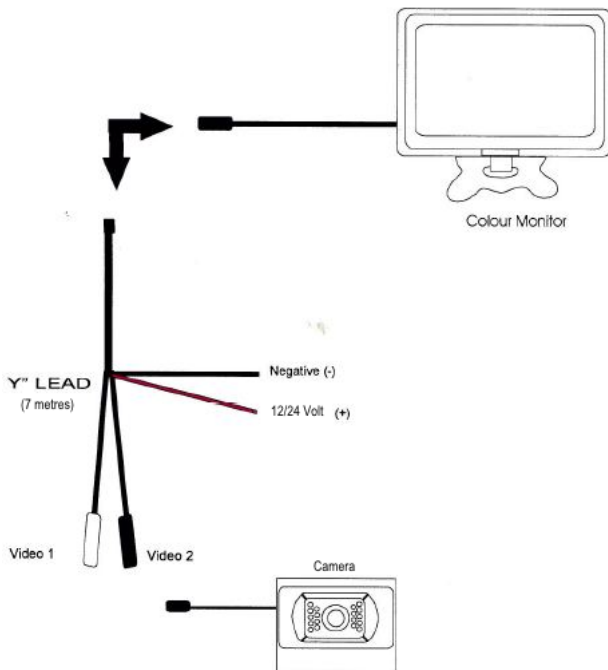


## WARNING


1. Connect red ( + ) to Positive
2. Connect black ( - ) to Negative
3. This is a 12 / 24 Volt system
4. Plug in all wiring as per diagram
5. Do not connect 12 / 24 volt supply until monitor and camera are connected
6. Warranty is voided if you cut or modify any of the cabling (excludes positive and negative wires)

## Optional Wiring Diagrams

### Option 1: Reverse only

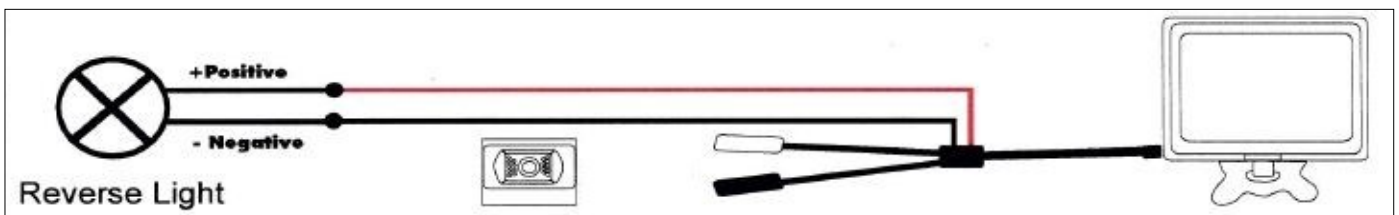

### Option 2: Continuous Operation

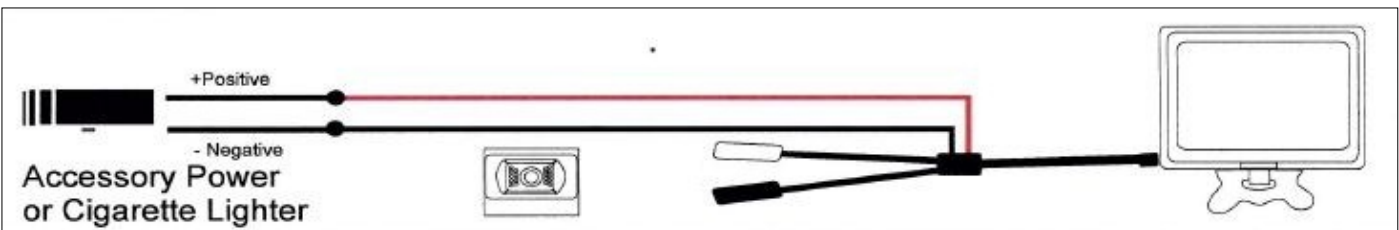

### Option 3: Reverse trigger with continuous override (uses a double pole dash mounted switch)

